



GAS ABSORBER



Certificates & Standards






STORAGE TANK

EMISSION CONTROL & SAFETY EQUIPMENT

Air & Gas Absorber

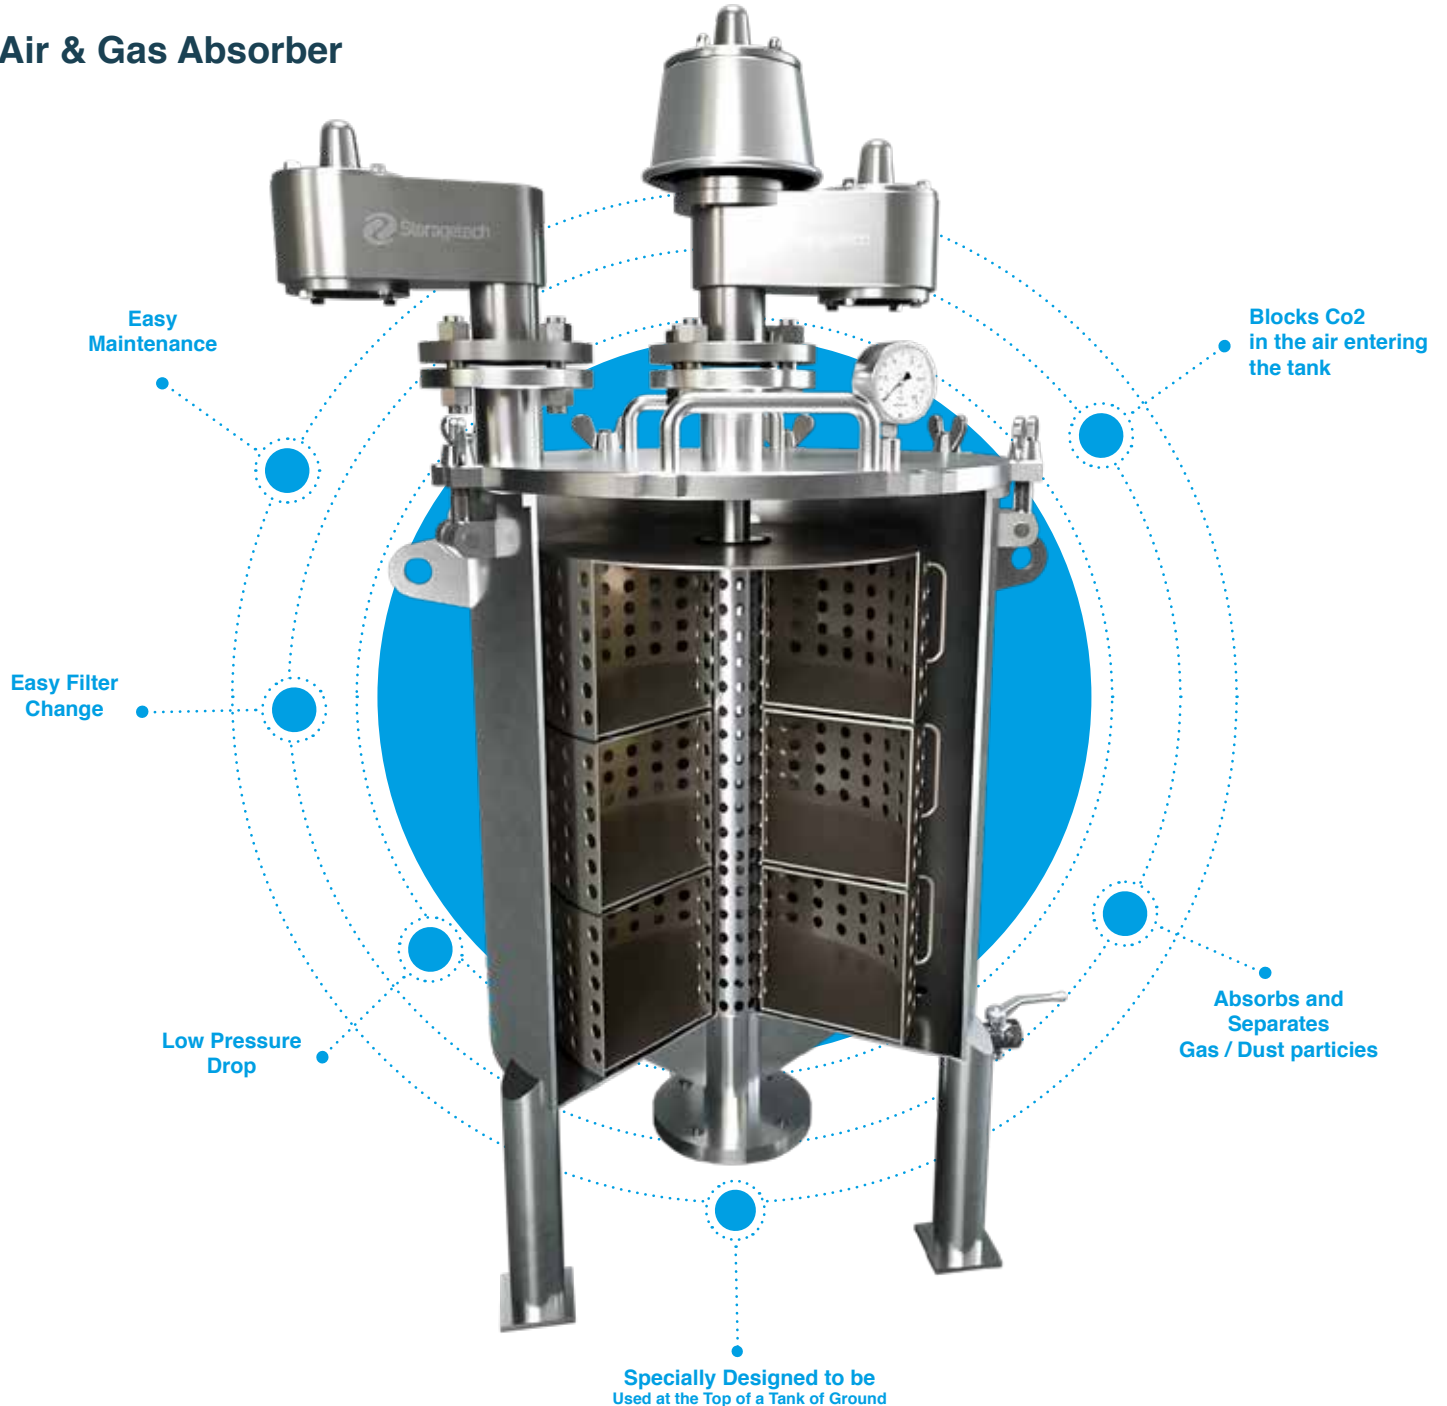

Product Description

Storagetech Model 1200 Storage Tank Vent Gas Absorber is Low-Pressure-Drop filtering product. Designed for liquids that interact with gases, dusts as well as particles which takes into the storage tanks from atmosphere during emptying operation. Also prevent extraction of harmful gasses to atmosphere during filling operations. Gas Absorbers is equipped with Low-Pressure-Drop MMHasso Filter cartridges. Replaceable MMHasso Filter cartridges contains cells and particulate filters.



Prevent Corrosion Effects

Corrosion is a serious danger for the systems, it might cause serious deficiencies. Unwanted elements in the flow are prevented with our absorber and that contributes the duration and long lifetime of your systems. Our Storage Tank Gas Absorber absorbs harmful gas go into the tank and helps to prevent corrosion.



Protection Against High Humidity And Evaporation

Tanks these are exposed to high humidity and steaming may start to aging and lose their durability. Storagetech Storage Tank Gas Absorber is designed to protect your products against harmful effects that also include high humidity and steaming. After the process is applied by our absorber, you can be sure that you will obtain higher resistant products.





Certificates & Standards



Specialising

Each request is specially evaluated and applicable methods are presented. Filtration process is carried out by both physical and chemical methods. Absorbent must be chosen truly.

Based on the correct definition of the unwanted gas or content, appropriate absorbent method can be chemical, physical or both which shall be applied to provide maximum effectiveness.

Additional Equipment

Utilizing combined ATEX certified flame arrester for flammable liquids, system protection can be achieved successfully. Specially designed flame arresters can be certified both IIA/IIB Gas Groups.

Key Features

- Prevents humidity and unwanted gas or content.
- Prevent corrosion effects.
- Absorbent color can be change.
- Change can observed with sight glass.
- Can be follow by automation from the control center.
- Easy filter change.
- Specially designed for use top of the tank or ground usage.
- Absorb gases in the air inlet the tank.
- To be increase gas contact surface area by the asymmetric filter placement.
- Low pressure drop.

Product Benefits

The absorption effect of the filters are maximized by specially designed increased geometry to slowing down the flow as much as possible to increase contact time of the molecules with absorbent.

By increasing the surface area with asymmetrically placed filter cartridges, unwanted gases are absorbed providing longer route and area to find enough time to contact with absorbent particles, thereby completely removal action is achieved successfully.

Thanks to the inclined roof design, issues that may arise due to atmospheric effects on the product are minimized and product life is extended any issue. It has already have own Pressure-Vacuum breathing vent which shall be delivered to site already set for operation pressure.



Different Option for Filter: HEPA

Model 1200 work with a specially designed HEPA filter for maximum filtration efficiency. HEPA, which stands for High Efficiency Particulate Air, is a designation used to describe filters that are able to trap 99.97 percent of particles that are 0.3 microns. This HEPA filters can also be easily extracted for cleaning and replacement.

Particles following a line of flow in the air stream come within one radius of a fiber and adhere to it. Mid side particles are being captured by this process. Particles below 0.3 microns are captured by diffusion in HEPA filter. An enhancing mechanism that is a result of the collision with gas molecules by the smallest particles, especially those below 0.1 microns in diameter, which are thereby impeded and delayed in their path through the filter; this behavior is similar to Brownian motion and raises the probability that a particle will be stopped by either interception or impaction; this mechanism becomes dominant at lower air flow.


Custom - Made Designing

Winter protection systems are specially designed for extreme cold areas, offered with self regulating heaters and insulation systems are provide protection up to -40C.



Pressure transmitter has the 4-20mA and having HART protocol. All activities can be monitored from the Control Center. The blockage of high, low or both impulse lines can be determined.

Pressure drops can be monitored utilizing differential pressure meter in the filter so that filter depletion that occurs before the planned product period or volumetric changes causing blockage issues are monitored effectively.



Color indicators are showing the depletion rate of the cartridges. Cartridge change can be achieved in a minutes with its user-friendly design.

Can Be Used Unpredictable Pressure Changes

Loading or unloading the tank may cause unpredictable pressure changes in the system and it may cause serious damages. Storagetechnik Storage Tank Gas Absorber is resistant to this kind of effects with Pressure Vacuum Vent and it can be used also under the unpredictable pressure changes conditions.

Can Be Used In Storage Tank Farms


Tank Farms implies the group of tanks that consists more than one tank. Storagetechnik Storage Tank Gas Absorber can be used also for the tank farms instead of using different absorbers for each tanks and that brings a serious cost reduction for the companies. It works perfectly for the tank farms and comes out with the same performance such as using it for the one tank.

Asymmetrically Increase The Surface Area

Storagetechnik Storage Tank Gas Absorber has its unique design to optimize the surface area and increase the effect of cartridges to make them absorb maximum harmful elements. Its perfect asymmetric design helps to obtain optimum result. By increasing the surface area with asymmetrically placed filter cartridges, unwanted gases are absorbed providing longer route and area to find enough time to contact with absorbent particules, thereby completely removal action is achieved successfully.



Advantages & Technical Details

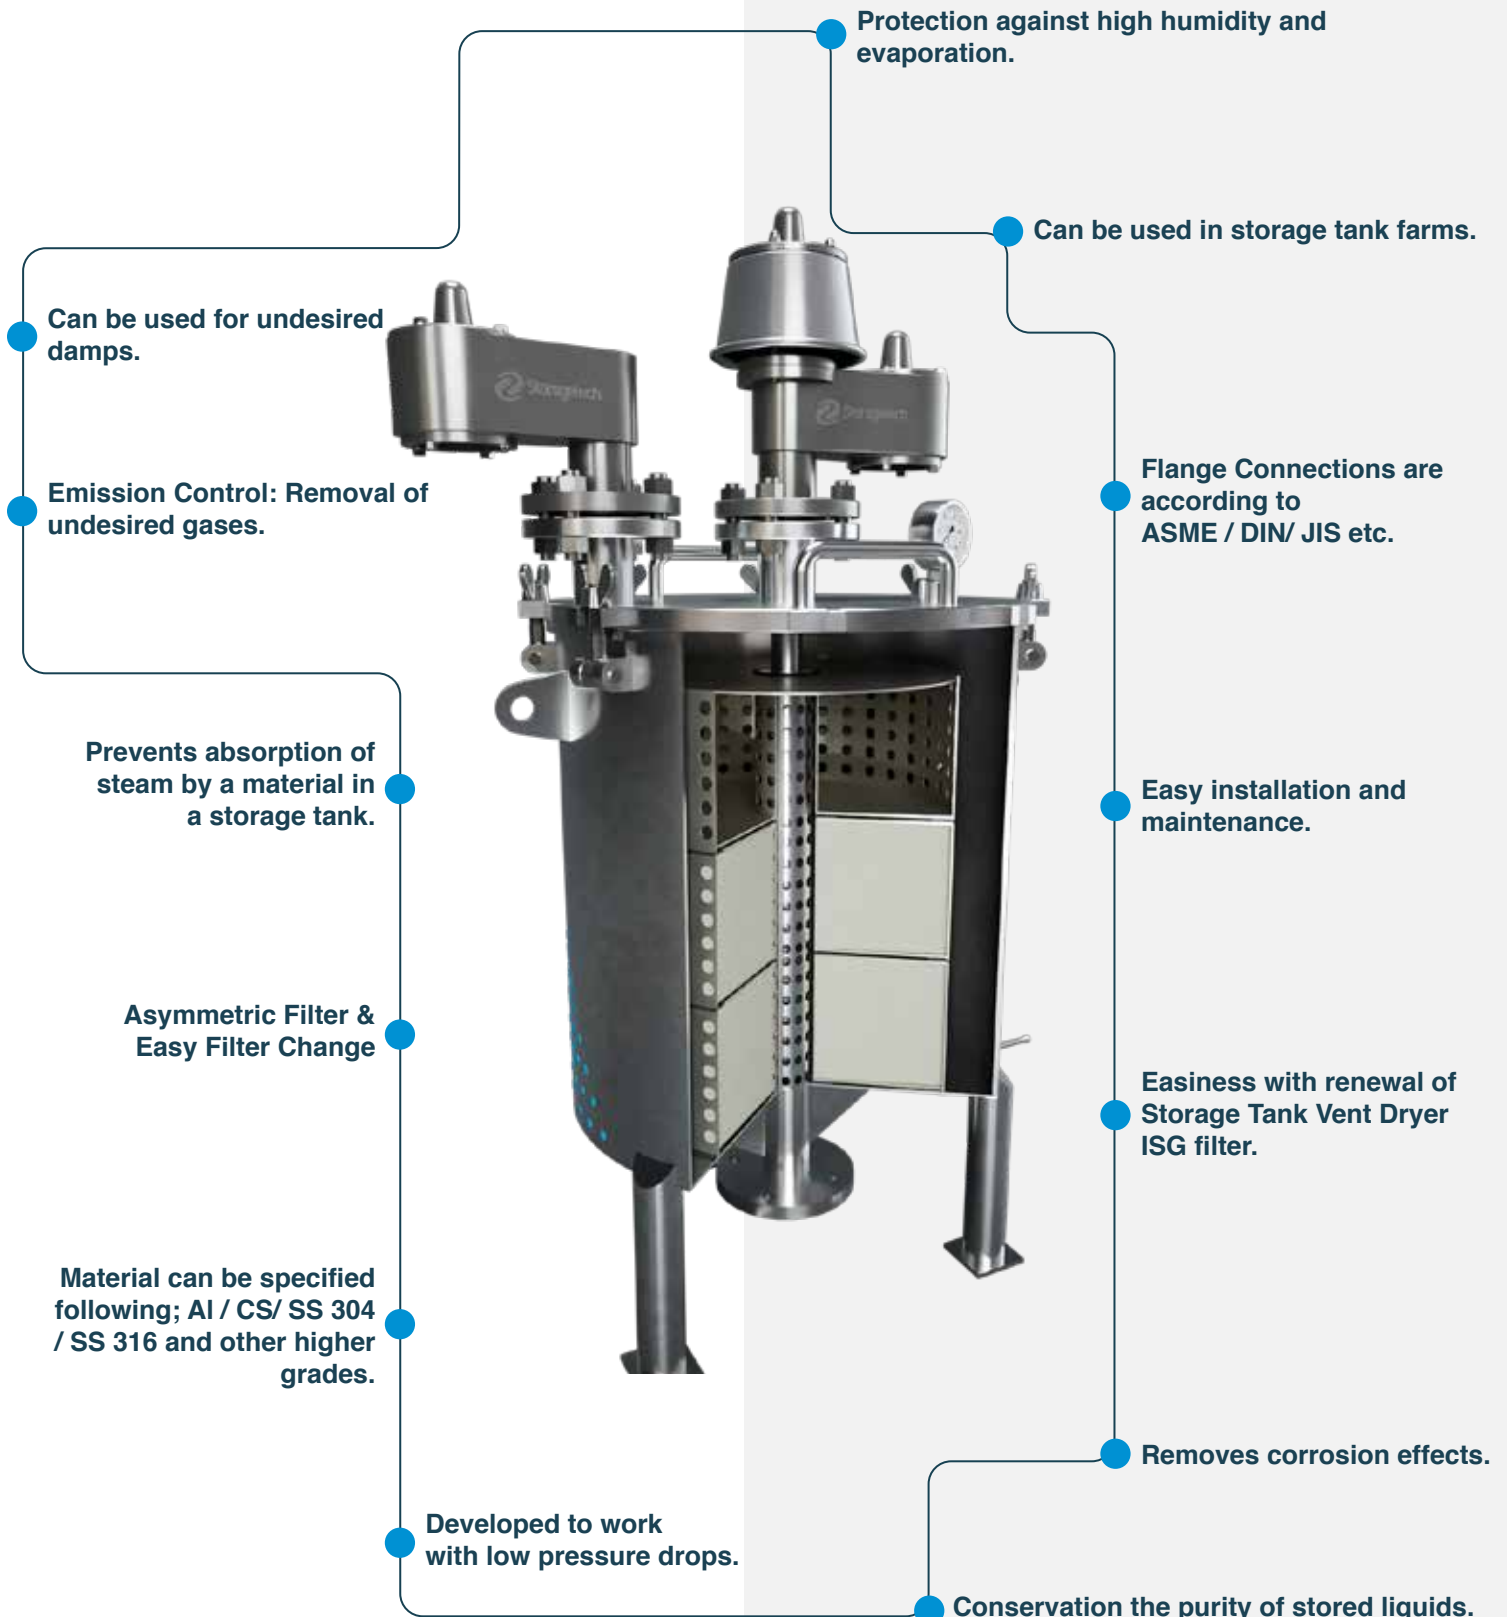

40 YEARS



Years
Of Experience

35.000



Square Meter
Manufacturing

200+



Diverse Range
Products

300+



Employees

QUALITY



Certificates

5+



Main
Office

30+



International
Representatives

4+



Regions



Äager GmbH

Germany Head Office + R&D + Sales

Herzogspitalstraße 24
Munich 80331
Germany
+49 (0) 89 1250 15240
www.aager.de
sales@aager.de

Turkey Head Office + Sales

Ağaoğlu My Office 212
No: 3 B Blok /175
P.K 34218 Güneşli – Bağcılar
İstanbul / Turkey
+90 212 485 40 07
+90 212 485 40 42
sales@aager.de

Turkey Factory + Engineering + R&D + Sales

Mersin Tarsus OSB.13.CD.NO:7
P.K: 33540 Mersin, Turkey
+90 324 676 44 04
+90 324 676 44 03
sales@aager.de

U.A.E. Sales + Warehouse

Jumeirah Lake Towers, X2 Tower 1906
P.O. Box: 123661 Dubai, U.A.E.
+971 4 450 8051
+971 4 450 8041
sales@aager.de

brochure series

CO2 Absorber

Revision No: 01
ST-BR-SS-02.24/V1

February 2024

aager.de

